


Digital pH measuring and regulating system, for private, public and commercial pools.

- > Simple and intuitive programming menu (password protected)
- > ENCODER system with easy friendly software interface
- > Electronic timeout alarm to avoid pH overdosing
- > Suction reed with pH level probe (optional)
- > Auto calibration with 2 buffers or DPD
- > Very broad measuring range (0-13.8)
- > Highly accurate pH scale ± 0.1
- > Progressive pH injection
- > Screwless clamp saddles
- > Long life pH electrode
- > Buffers included

| Specifications |

Power Supply: 220/240Vac 50/60Hz
Injection Pump: Peristaltic
Injection Flow: 1,5 l/h
Injection Pressure: 2,5 Bar
Water Temperature Range: 12°C to 40°C
Room Temperature: Tested at 50°C
Buffers: 4 & 7
Warranty: 2 Years

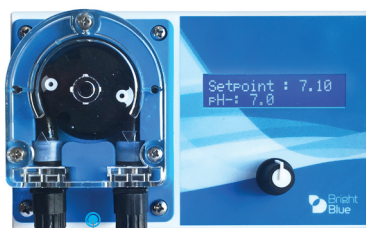

W155mm X H94mm X L80mm

00 ↔ 13.8

pH Scale

$\pm 0,01$

pH Precision



Encoder



Alarm

EL Probe

EL Probe

2

YEARS

Warranty

Accessories



SANUS Compact MODELS

CODE	MODEL	DESCRIPTION	PRESSURE FLOW l/h - Bar
100000765 ^A	SANUS Compact		1.5-2.5
100000991 ^A		pH Buoy Tank with Aspiration Tube	